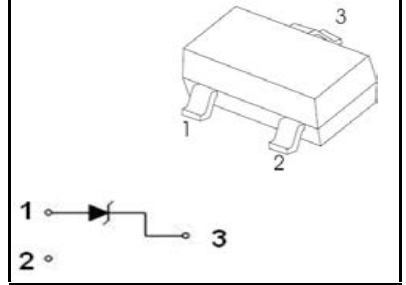


SOT-23 Plastic-Encapsulate Diodes**MMBZ5221C-MMBZ5259C****Zener Diodes****SOT-23****FEATURES**

- Zener Voltages From 2.4V - 39V
- 300mW Power Dissipation
- Planar Die Construction

MAXIMUM RATINGS ($T_a=25^{\circ}\text{C}$ unless otherwise noted)

Characteristic	Symbol	Value	Unit
Forward Voltage @ $I_F=10\text{mA}$	V_F	0.9	V
Power Dissipation	P_D	300	mW
Thermal Resistance from Junction to Ambient	$R_{\theta JA}$	417	$^{\circ}\text{C/W}$
Operation Junction and Storage Temperature Range	T_J, T_{stg}	-55~+150	$^{\circ}\text{C}$


ELECTRICAL CHARACTERISTICS ($T_a=25^{\circ}\text{C}$ unless otherwise specified)

Type Number	Marking Code	Zener Voltage Range			Test Current	Maximum Zener Impedance		Maximum Reverse Leakage Current	
		V _Z @ I _{ZT}			I _{ZT}	Z _{ZT} @ I _{ZT}	Z _{ZK} @ I _{ZK} =0.25mA	I _R	@V _R
		Nom (V)	Min (V)	Max (V)	mA	Ω		μA	V
MMBZ5221C	2KC1	2.4	2.35	2.45	20	30	1200	100	1.0
MMBZ5222C	2KC2	2.5	2.45	2.55	20	30	1250	100	1.0
MMBZ5223C	2KC3	2.7	2.65	2.75	20	30	1300	75	1.0
MMBZ5225C	2KC5	3.0	2.94	3.06	20	30	1600	50	1.0
MMBZ5226C	2KG1	3.3	3.23	3.37	20	28	1600	25	1.0
MMBZ5227C	2KG2	3.6	3.53	3.67	20	24	1700	15	1.0
MMBZ5228C	2KG3	3.9	3.82	3.98	20	23	1900	10	1.0
MMBZ5229C	2KG4	4.3	4.21	4.39	20	22	2000	5.0	1.0
MMBZ5230C	2KG5	4.7	4.61	4.79	20	19	1900	5.0	2.0
MMBZ5231C	2KE1	5.1	5.00	5.20	20	17	1600	5.0	2.0
MMBZ5232C	2KE2	5.6	5.49	5.71	20	11	1600	5.0	3.0
MMBZ5233C	2KE3	6.0	5.88	6.12	20	7	1600	5.0	3.5
MMBZ5234C	2KE4	6.2	6.08	6.32	20	7	1000	5.0	4.0
MMBZ5235C	2KE5	6.8	6.66	6.94	20	5	750	3.0	5.0
MMBZ5236C	2KF1	7.5	7.35	7.65	20	6	500	3.0	6.0
MMBZ5237C	2KF2	8.2	8.04	8.36	20	8	500	3.0	6.5
MMBZ5238C	2KF3	8.7	8.53	8.87	20	8	600	3.0	6.5
MMBZ5239C	2KF4	9.1	8.92	9.28	20	10	600	3.0	7.0
MMBZ5240C	2KF5	10	9.80	10.20	20	17	600	3.0	8.0
MMBZ5241C	2KH1	11	10.78	11.22	20	22	600	2.0	8.4
MMBZ5242C	2KH2	12	11.76	12.24	20	30	600	1.0	9.1
MMBZ5243C	2KH3	13	12.74	13.26	9.5	13	600	0.5	9.9
MMBZ5244C	2KH4	14	13.72	14.28	9.0	15	600	0.1	10
MMBZ5245C	2KH5	15	14.70	15.30	8.5	16	600	0.1	11
MMBZ5246C	2KJ1	16	15.68	16.32	7.8	17	600	0.1	12
MMBZ5247C	2KJ2	17	16.66	17.34	7.4	19	600	0.1	13
MMBZ5248C	2KJ3	18	17.64	18.36	7.0	21	600	0.1	14
MMBZ5249C	2KJ4	19	18.62	19.38	6.6	23	600	0.1	14
MMBZ5250C	2KJ5	20	19.60	20.40	6.2	25	600	0.1	15
MMBZ5251C	2KK1	22	21.56	22.44	5.6	29	600	0.1	17
MMBZ5252C	2KK2	24	23.52	24.48	5.2	33	600	0.1	18
MMBZ5253C	2KK3	25	24.50	25.50	5.0	35	600	0.1	19
MMBZ5254C	2KK4	27	26.46	27.54	5.0	41	600	0.1	21
MMBZ5255C	2KK5	28	27.44	28.56	4.5	44	600	0.1	21
MMBZ5256C	2KM1	30	29.40	30.60	4.2	49	600	0.1	23
MMBZ5257C	2KM2	33	32.34	33.66	3.8	58	700	0.1	25
MMBZ5258C	2KM3	36	35.28	36.72	3.4	70	700	0.1	27
MMBZ5259C	2KM4	39	38.22	39.78	3.2	80	800	0.1	30


Typical Characteristics

Notes: Our company currently provide 5.1 V - 20 V products only


Zener Characteristics (V_Z Up to 10 V)

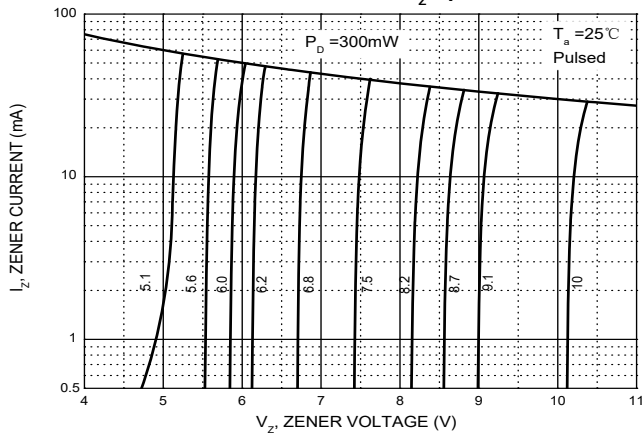


Zener Characteristics (11 V to 20 V)

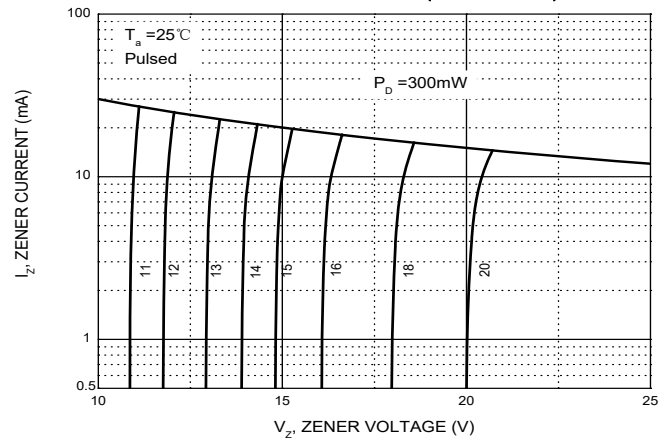


Temperature Coefficients

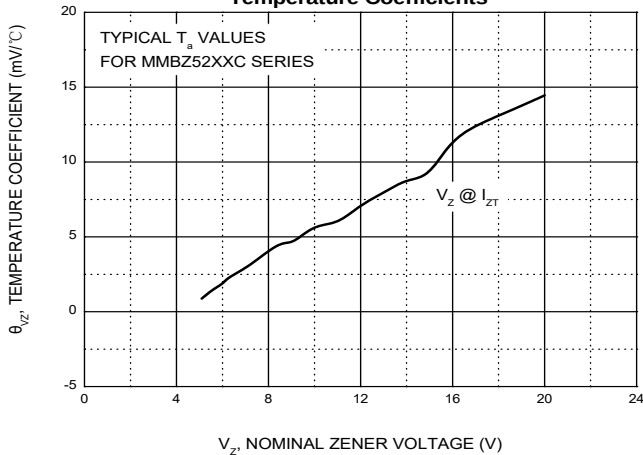


Typical Leakage Current

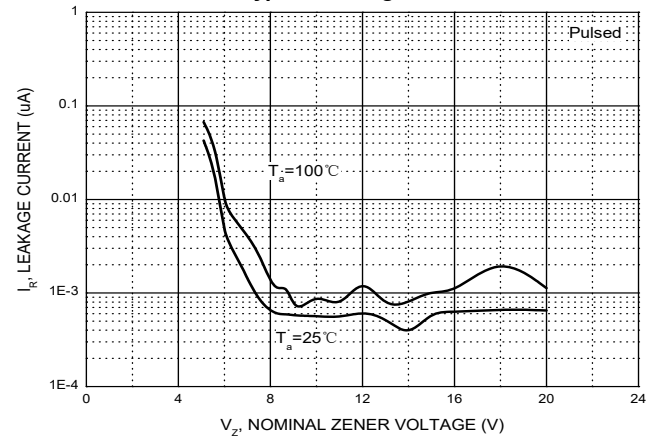


Typical Capacitance

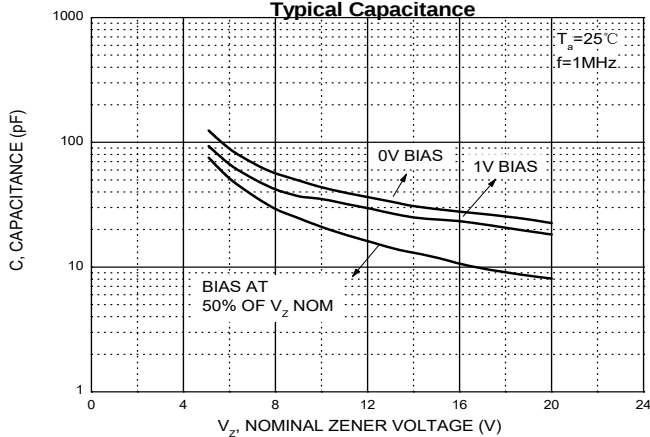

Effect of Zener Voltage on Zener Impedance

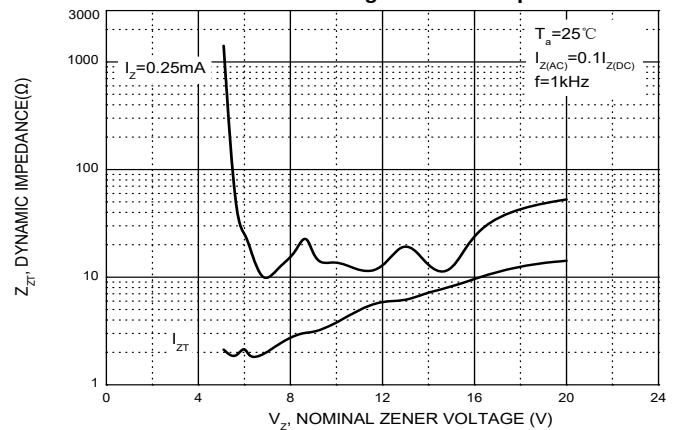

Power Derating Curve

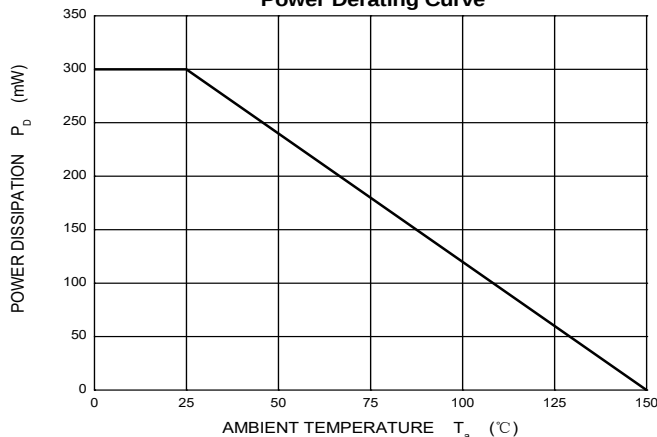

Package Outline Dimensions (SOT-23)



Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	0.900	1.150	0.035	0.045
A1	0.000	0.100	0.000	0.004
A2	0.900	1.050	0.035	0.041
b	0.300	0.500	0.012	0.020
c	0.080	0.150	0.003	0.006
D	2.800	3.000	0.110	0.118
E	1.200	1.400	0.047	0.055
E1	2.250	2.550	0.089	0.100
e	0.950 TYP		0.037 TYP	
e1	1.800	2.000	0.071	0.079
L	0.550 REF		0.022 REF	
L1	0.300	0.500	0.012	0.020
θ	0°	8°	0°	8°

Suggested Pad Layout (SOT-23)



Note:
1.Controlling dimension:in millimeters.
2.General tolerance:± 0.05mm.
3.The pad layout is for reference purposes only.