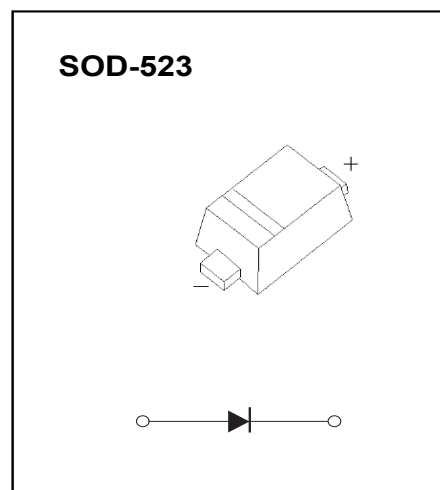



**SOD-523 Plastic-Encapsulate Diodes****SD103AX****SCHOTTKY BARRIER DIODE****FEATURES**

- Low Forward Voltage Drop
- Low Reverse Recovery Time
- Low Reverse Capacitance





**MARKING****MAXIMUM RATINGS** ( $T_a=25^{\circ}\text{C}$  unless otherwise noted)

| Symbol          | Parameter                                         | Value    | Unit                        |
|-----------------|---------------------------------------------------|----------|-----------------------------|
| $V_{RRM}$       | Peak Repetitive Reverse Voltage                   | 40       | V                           |
| $V_{RWM}$       | Working Peak Reverse Voltage                      |          |                             |
| $V_R$           | DC Blocking Voltage                               |          |                             |
| $V_{R(RMS)}$    | RMS Reverse Voltage                               | 28       | V                           |
| $I_{FM}$        | Forward Continuous Current                        | 350      | mA                          |
| $I_{FSM}$       | Non-Repetitive Peak Forward Surge Current@t=8.3ms | 2        | A                           |
| $P_D$           | Power Dissipation                                 | 150      | mW                          |
| $R_{\theta JA}$ | Thermal Resistance From Junction To Ambient       | 667      | $^{\circ}\text{C}/\text{W}$ |
| $T_j$           | Operating Junction Temperature Range              | -40~+125 | $^{\circ}\text{C}$          |
| $T_{stg}$       | Storage Temperature Range                         | -55~+150 | $^{\circ}\text{C}$          |


**ELECTRICAL CHARACTERISTICS** ( $T_a=25^{\circ}\text{C}$  unless otherwise specified)

| Parameter             | Symbol     | Test conditions                                             | Min | Typ  | Max  | Unit          |
|-----------------------|------------|-------------------------------------------------------------|-----|------|------|---------------|
| Reverse voltage       | $V_{(BR)}$ | $I_R=100\mu\text{A}$                                        | 40  |      |      | V             |
| Reverse current       | $I_R$      | $V_R=30\text{V}$                                            |     |      | 5    | $\mu\text{A}$ |
|                       |            | $V_R=20\text{V}$                                            |     |      | 2    |               |
|                       |            | $V_R=10\text{V}$                                            |     |      | 1    |               |
| Forward voltage       | $V_F$      | $I_F=1\text{mA}$                                            |     | 0.27 |      | V             |
|                       |            | $I_F=5\text{mA}$                                            |     | 0.32 |      |               |
|                       |            | $I_F=20\text{mA}$                                           |     |      | 0.37 |               |
|                       |            | $I_F=200\text{mA}$                                          |     |      | 0.6  |               |
| Total capacitance     | $C_{tot}$  | $V_R=0\text{V}, f=1\text{MHz}$                              |     | 50   |      | pF            |
| Reverse recovery time | $t_{rr}$   | $I_F=I_R=200\text{mA}, I_{rr}=0.1\times I_R, R_L=100\Omega$ |     | 10   |      | ns            |

## Typical Characteristics

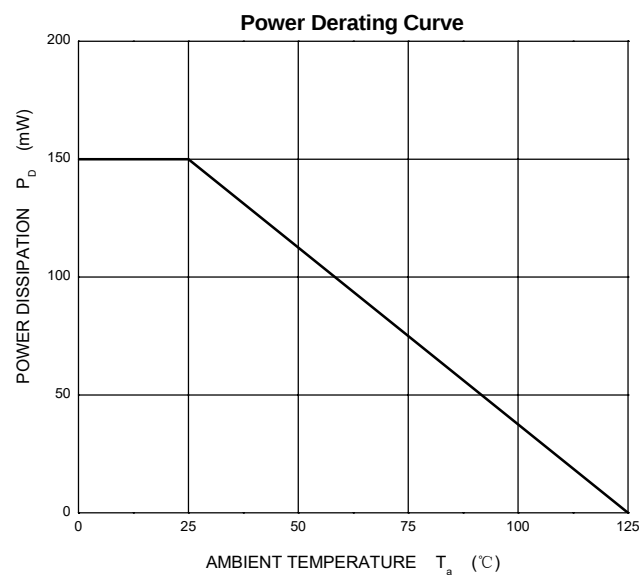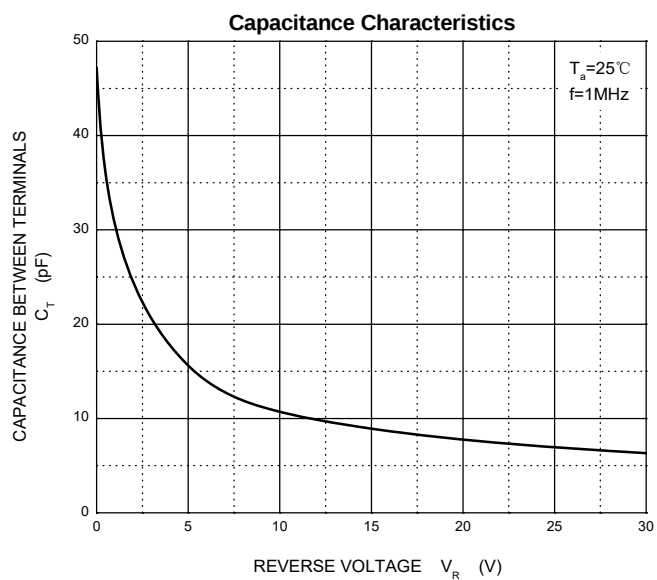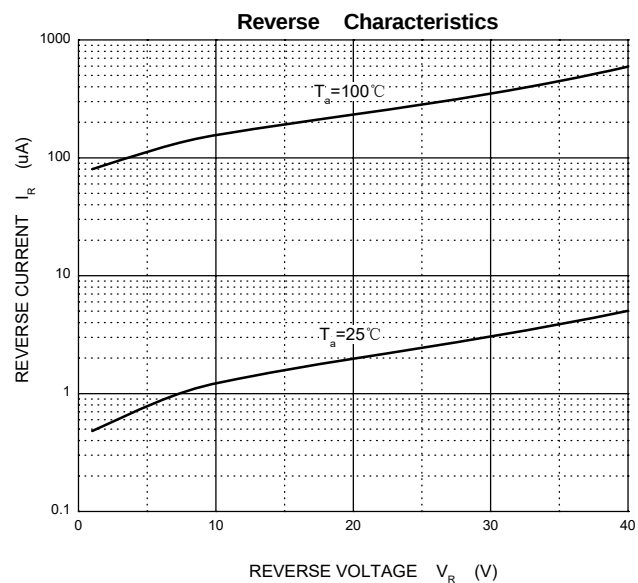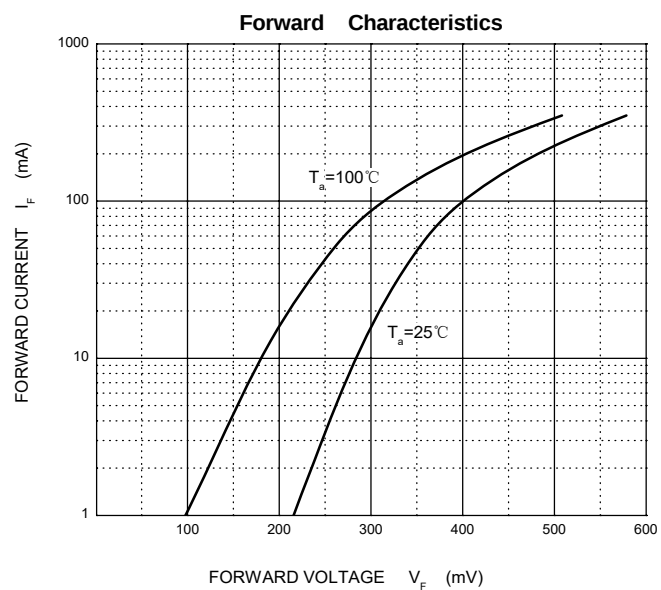


Package Outline Dimensions (SOD-523)

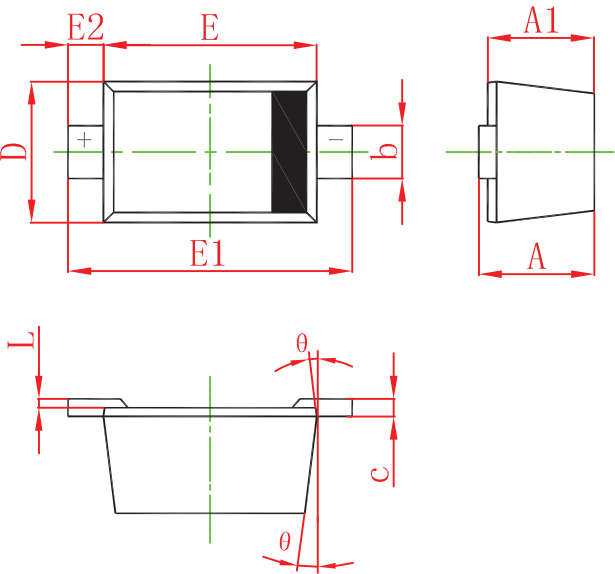

| Symbol | Dimensions In Millimeters |       | Dimensions In Inches |       |
|--------|---------------------------|-------|----------------------|-------|
|        | Min                       | Max   | Min                  | Max   |
| A      | 0.510                     | 0.770 | 0.020                | 0.031 |
| A1     | 0.500                     | 0.700 | 0.020                | 0.028 |
| b      | 0.250                     | 0.350 | 0.010                | 0.014 |
| c      | 0.080                     | 0.150 | 0.003                | 0.006 |
| D      | 0.750                     | 0.850 | 0.030                | 0.033 |
| E      | 1.100                     | 1.300 | 0.043                | 0.051 |
| E1     | 1.500                     | 1.700 | 0.059                | 0.067 |
| E2     | 0.200 REF                 |       | 0.008 REF            |       |
| L      | 0.010                     | 0.070 | 0.001                | 0.003 |
| θ      | 7° REF                    |       | 7° REF               |       |

Suggested Pad Layout (SOD-523)



- Note:
- 1.Controlling dimension:in millimeters.
  - 2.General tolerance:± 0.05mm.
  - 3.The pad layout is for reference purposes only.